



# FO3

## TECHNICAL FEATURES

Head:	brass
Ring:	brass
Sump:	transparent SAN- Trogamid
O.RING SAN:	VITON
Working pressure SAN version:	8 bar max
Working pressure Trog version:	12 bar max
Burst pressure SAN version:	35 bar max
Burst pressure Trog version:	50 bar max
Working temperature SAN:	0°C + 50°C min/max
Working temperature Trogamid:	0°C + 80°C min/max
Capacity (empty) at 2 bar:	3/4" F 105 lt/min - 1" F 105,99 lt/min - 1 1/4" F 219 lt/min 1 1/2" F 216 lt/min - 2" F 194 lt/min
Life test:	200.000 cycles from 0-10 bar

## FO3 HOUSING WITH TRANSPARENT SAN SUMP





CODE	MOD	HEIGHT	INLET/OUTLET	DIMENSIONS	QUANTITY	kgs	VOLUME	
								c
A3010010	FO3	5"	3/4" F	150 x 193	8	46,00	0,112	
A3010020	FO3	7"	3/4" F	150 x 244	8	24,76	0,091	
A3010030	FO3	9 3/4"	3/4" F	150 x 310	8	25,99	0,091	
A3010040	FO3	20"	3/4" F	150 x 573	6	16,62	0,108	
A3010050	FO3	5"	1" F	150 x 193	8	44,24	0,112	
A3010060	FO3	7"	1" F	150 x 244	8	23,95	0,091	
A3010070	FO3	9 3/4"	1" F	150 x 310	8	25,18	0,091	
A3010080	FO3	20"	1" F	150 x 573	6	16,05	0,108	
A3010090	FO3	7"	1 1/4" M	150 x 244	8	24,48	0,091	
A3010100	FO3	9 3/4"	1 1/4" M	150 x 310	8	25,68	0,091	
A3010110	FO3	20"	1 1/4" M	150 x 573	6	16,31	0,108	
A3010120	FO3	9 3/4"	1 1/2" F	150 x 340	6	19,93	0,108	
A3010130	FO3	20"	1 1/2" F	150 x 603	6	22,23	0,108	
A3010140	FO3	9 3/4"	2" F	150 x 340	6	17,53	0,108	
A3010150	FO3	20"	2" F	150 x 603	6	19,80	0,108	

D: ø112  
E: 45  
F: 34  
G: M5

Designed to hold cartridges:

5" 7" 9" 3/4 20"

## FO3 HOUSING WITH TROGAMID SUMP



CODE	MOD	HEIGHT	INLET/OUTLET	DIMENSIONS	QUANTITY	kgs	VOLUME	
								c
A3020010	FO3	5"	3/4" F	150 x 193	8	46,00	0,112	
A3020020	FO3	7"	3/4" F	150 x 244	8	24,76	0,091	
A3020030	FO3	9 3/4"	3/4" F	150 x 310	8	25,99	0,091	
A3020050	FO3	5"	1" F	150 x 193	8	44,24	0,112	
A3020060	FO3	7"	1" F	150 x 244	8	23,95	0,091	
A3020070	FO3	9 3/4"	1" F	150 x 310	8	25,18	0,091	
A3020090	FO3	7"	1 1/4" M	150 x 244	8	24,48	0,091	
A3020100	FO3	9 3/4"	1 1/4" M	150 x 310	8	25,68	0,091	
A3020120	FO3	9 3/4"	1 1/2" F	150 x 340	6	19,93	0,108	
A3020140	FO3	9 3/4"	2" F	150 x 340	6	17,53	0,108	


D: ø112  
E: 45  
F: 34  
G: M5

**fix**

TECHNICAL FEATURES

Head:	stainless steel 304/L
Sump:	stainless steel 304/L
O.RING:	VITON
Working pressure:	15 bar max
Burst pressure:	60 bar max
Working temperature:	0°C + 100°C min/max
Capacity (empty) at 2 bar:	1" 105 lt/min
Life test:	200.000 cycles from 0-10 bar

FIX HOUSING IN 304/L STAINLESS STEEL

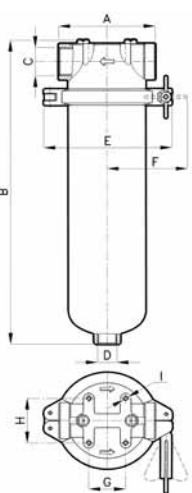

CODE	MOD	HEIGHT	INLET/OUTLET	DIMENSIONS	QUANTITY	kg	VOLUME
			c	a x b e (mm)	box		package
A3030050	FIX	9"3/4	1"F	110 x 354 146	6	16,44	0,108

D: 1/2"  
G: 42  
H: 52  
I: M6

Designed to hold cartridges:

9" 3/4

Upon request 316/L

