



Its high capacity tank enables Sanipius to pump away large quantities of waste waters from the bathroom. Its specific motor enables it to function for longer periods.





5 m  
100 m

# SANIPLUS®



- Inlets diameter:** 40 mm
- Discharge pipework:** 22/28/32 mm
- IP rating:** IP44
- Electrical power supply:** 220-240 V; 50Hz/60Hz
- Motor power:** 400 W
- Weight:** 7.4 KG
- Non return valve included
- Active carbon filter included

VERTICAL AND HORIZONTAL  
DISCHARGE: **↑ 5 M → 100 M**

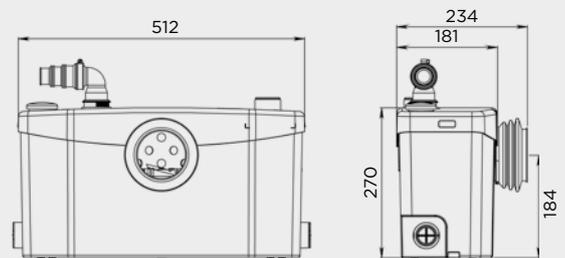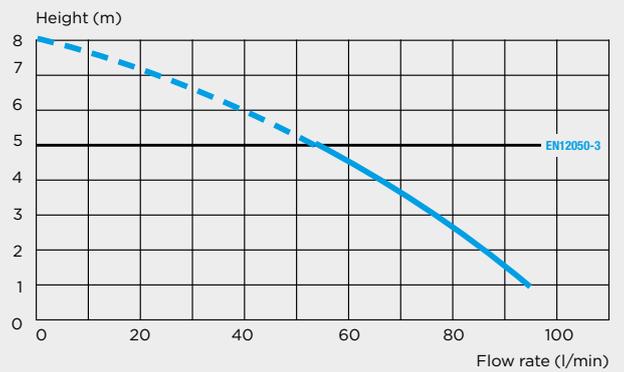

## BENEFITS

- Two side inlets and a greater tank capacity
- Works with high output power showers