




Saniflo

									
			Toilet	Wall-hung Toilet	Wash basin	Bidet	Shower cubicle	Collectivity	Easy operation
	Saniflo Perfect for toilet drainage		•						
	Sanitop Drains both the toilet and washbasin		•		•				
	Sanipro Xr Drains all the water from a complete bathroom		•		•	•	•		
	Saniplus Large capacity tank: perfect for handling large volumes of water		•		•	•	•		
	Sanibest Pro High performance solution! Perfect for communities		•		•	•	•	•	✓
	Sanigrind Pro The unique solution for S-trap toilets		•		•	•	•	•	✓
	Saniwall Pro Up The solution (macerator + GROHE support frame) for installing a wall-hung bowl. Available as a glass-clad version or tiled			•	•	•	•		✓
	Saniwall Pro Up Style The solution (macerator + GROHE support frame) for installing a wall-hung bowl. Available as a White marble version or Cement grey			•	•	•	•		✓
	Sanipack The macerator for wall-hung bowls that fits in partitions			•	•	•	•		✓
	Saniaccess 1-2-3 Complete solutions perfect for rental accommodation		•		•	•	•		✓
	Sanifix Accessible toilet seat								
	Saniseat+ Washlet seat								
	Descaler Special sanitising cleaner								
	Sanialarm Security								



SOME RULES FOR INSTALLING A SFA MACERATOR

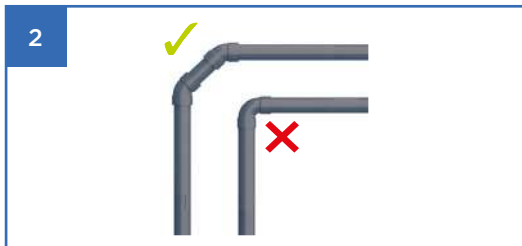


- For the installation of connection elbows on the drainage piping, use 2 x 45° elbows rather than one 90° elbow.


The larger radius curves **DECREASE** the discharge losses.



- If the discharge takes place in a direct downwards way, provide for an aerator valve placed at the highest point to avoid the siphoning phenomenon.

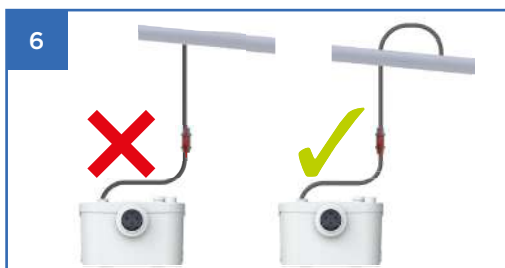

- The macerator discharge pipe must be connected to the downspout **from above**, following the direction of flow.

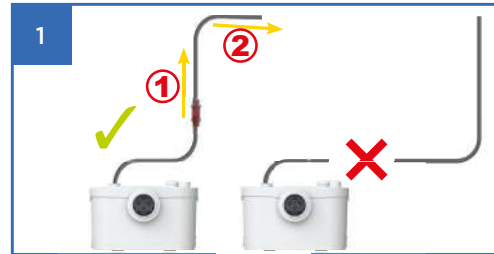

- Vertical pumping must take place at the start of the DISCHARGE (1). From the highest point of the discharge (2), an incline of at least 1% is necessary.



- Plan for a slope between the sanitary appliances and the SFA macerator.



- The appliance must not be installed **more than 20 cm behind the toilet**, nor at a lower level than the bowl.



- No sanitary appliance must be connected to the small diameter drainage pipe **specific to the macerator**.

Sanipack



5 m
100 m



PRODUCT BENEFITS

- The macerator for wall-hung toilets that can be discreetly hidden from view
- Allows for a complete shower room

CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40, 100 mm




Single blade cutter

PACK CONTAINS

non-return valve, connectors, activated carbon filter included to neutralise odours, package delivered without plug

CURVE

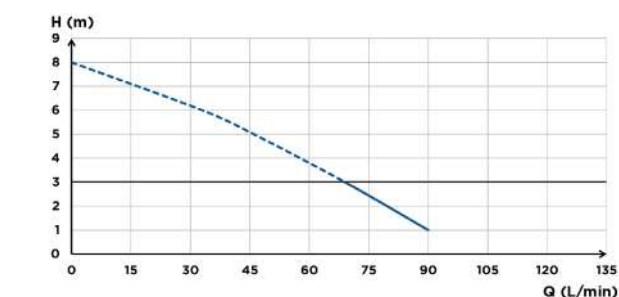

— recommended max height: 5 m

TECHNICAL FEATURES

Number of inlets	4
External inlet diameter	40, 100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35 °C
Min. shower tray height	130 mm
Maximum distance from the toilet	max. 50 cm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Noise level	47 dB(A)
Identification and logistics	
Gross weight	7 kg
EAN code	3308811209016
Product code	PA2STD

DIMENSIONS

