




Sanivite's powerful pump has 4 inlets for connection to domestic sinks or appliances. Its compact dimensions makes it the perfect solution to install a kitchen or a sink anywhere.

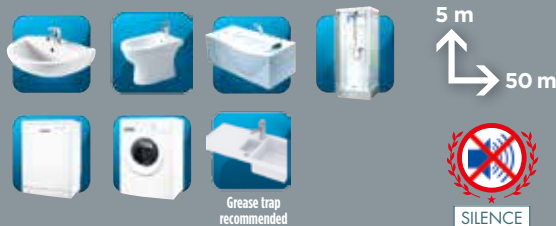

SANIVITE®

PUMP TECHNICAL DATA

Maximum flow rate: 100L/min
Shut-off head (Q=0 l/min): 8 m
Vertical and horizontal discharge : 5m/ 50m
IP rating: IP44
Tank volume: 10,4L
Free passage: 8 mm
Discharge pipe diameter : DN32 (Ø ext.32 mm)
Inlets diameter: 4 inlets DN40 (Ø ext. 40 mm)
Low inlets height (compared to ground level): 46 mm
Activation level ON (compared to ground level): 115 mm
Maximum admissible waste water temperature: 60° C (max 5 min)
Weight: 6.2 Kg
Non return valve included

MOTOR DATA

Electrical power supply : Single-phase 220-240V; 50Hz/60Hz
Electrical power rating: 400W
Maximum current input: 2A
Electrical class: I
Thermally protected
Oil-filled

MATERIALS

Motor body: Polyamide	Pump cover plate: Polyamide
Impeller: Polyamide	Motor shaft: Stainless steel
O-Ring: Nitrile	Sealing ring: Nitrile

